
CI-NAP 108

Product Sheet

The CI-NAP 108 is an exceptional, 8-channel rack-mountable power amplifier. Working in conjunction with the CI-Uniti 102, it facilitates the usage of larger audio zones with multiple speakers whilst staying true to the revered Naim Audio sound. Localised inputs also allow the separation of up to 8 different streams.



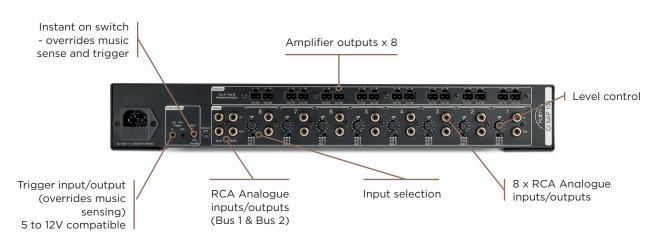

Key Features

- •10 RCA inputs, with 8 local inputs and 2 x bus L/R inputs
- 10 RCA outputs for daisy-chaining to other amplifiers, such as the CI-NAP 101
- Inbuilt quiet, efficient and compact power amplifier, capable of driving multiple speakers.
- Dual Euroblock outputs for easy parallel speaker connections
- Independent level control
- Temperature-controlled fan
- Music sensing with auto-standby activating after 20 minutes
- Universal mains power 100V 240V
- 0.5W standby
- 19" rack-mountable



Specifications

Туре		Amplifier
		·
Number of channels		8
Power (Low Impedance)	8Ω	150W
	4Ω	260W
	2Ω	260W
Input connections		Analogue – RCA – (47 $k\Omega$)
Output connections	Line	RCA
	Speakers	Euroblock
Total Harmonic Distortion (THD+N@1kHz)		<0,006%
Gain		29dB
Signal-to-noise ratio		105dB (A-Weighted)
Frequency response (-3dB)		3Hz - 70kHz
Operating power supply		100V to 240V +/-10%, 50/60Hz
Wired Automation		12V in/out
Rack height		1.5U
Dimensions (H x L x D)		2 ^{5/8} x17 ^{3/8} x11 ^{3/4} " (6.66 x 44 x 30cm)
Weight		15.43lbs (7.7kg)
Nominal power consumed		340W
Power consumption in standby mode		0.5W
Operating temperature		5°C to 35°C
Storage temperature		-20°C to 60°C

