

DALI PHANTOM H-80 R & H-60 R

RECTANGULAR VERSION OF
THE H-SERIES IN-WALL SPEAKERS

RECTANGULAR DESIGN

Same sound, same features – new look.

WOOD FIBRE CONES


Low mass and low resonance material for an uncoloured sound.

LOW RESONANCE BAFFLE

Like the H-series, H-R speakers feature an MDF baffle, that helps to dampen unwanted resonances and lowers distortion.

WIDE DISPERSION

Like all DALI speakers, the H-R series is optimised for great off-axis listening, offering fantastic sound quality, even when seated off-centre..

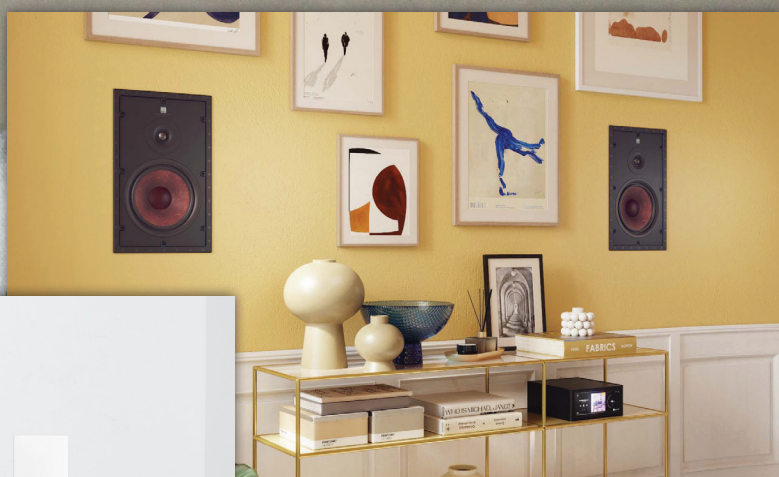

IN ADMIRATION OF MUSIC



H-80 R

SPECIFICATIONS

Frequency Range +/-3dB [Hz]	46 - 25,000
Sensitivity (2.83V/1m)[dB]	90
Nominal Impedance [ohm]	6
Maximum SPL [dB]	109
Crossover Frequency [Hz]	2,350
Recommended Placement	In-wall In-ceiling
Recommended Amplifier Power [Watt]	30 - 200
High Frequency Driver	1 x 28 mm. Soft dome
Low Frequency Driver	1 x 8"
Connection Input	Single wire
Dimensions (H x B x D) [cm]	45,2 x 28,4 x 9,5
Dimensions (H x B x D) [inches]	17,8 x 11,2 x 3,7
Cut-out Dimensions (H x B) [cm]	42,7 x 26,0
Cut-out Dimensions (H x B) [inches]	16,8 x 10,2
Weight [kg/lbs]	3,7 kg / 8,1 lbs
Finish	White
Accessories	Cut-out template, 3mm Allen key Logo badge Front grille



H-60 R

SPECIFICATIONS

Frequency Range +/-3dB [Hz]	51 - 25,000
Sensitivity (2.83V/1m)[dB]	89
Nominal Impedance [ohm]	6
Maximum SPL [dB]	107
Crossover Frequency [Hz]	1,900
Recommended Placement	In-wall In-ceiling
Recommended Amplifier Power [Watt]	30 - 150
High Frequency Driver	1 x 28 mm. Soft dome
Low Frequency Driver	1 x 6½"
Connection Input	Single wire
Dimensions (H x B x D) [cm]	41,4 x 24,4 x 9,5
Dimensions (H x B x D) [inches]	16,3 x 9,6 x 3,7
Cut-out Dimensions (H x B) [cm]	39,0 x 22,0
Cut-out Dimensions (H x B) [inches]	15,4 x 8,7
Weight [kg/lbs]	3,1 kg / 6,8 lbs
Finish	White
Accessories	Cut-out template, 3mm Allen key Logo badge Front grille