


CS-6

In-surface coaxial surround

The CSX-6 is the ultimate, precisely aimed yet discreet surround speaker, designed for invisible installation directly into walls or ceilings. Featuring the 6" coaxial driver, this speaker delivers the perfect sound positioning precision. Thanks to its 20° tilted sound axis, the CSX-6 is the ideal choice for overhead top surround or side surround positions.

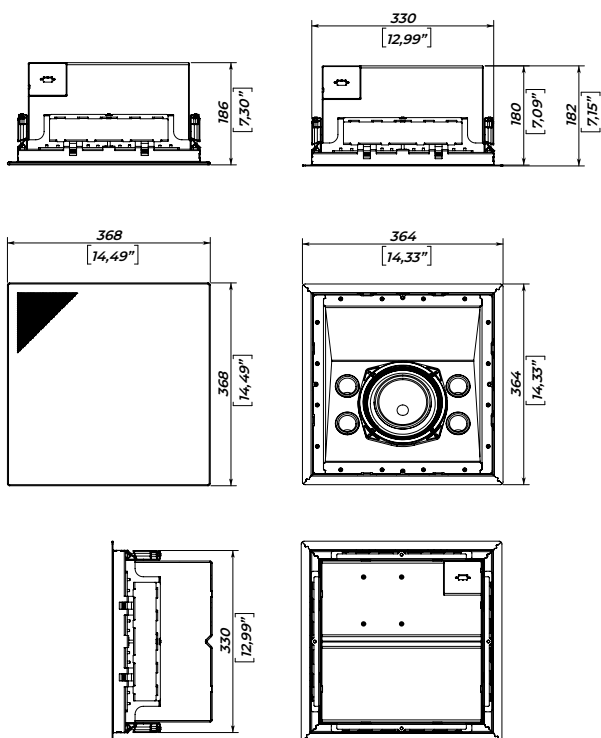

SAFETY INSTRUCTIONS

1. Keep liquids, direct sunlight, open flames, and heat sources away from the speaker system to prevent damage or failure.
2. Avoid using the system with damaged connectors or cables to prevent electrical shock or fire hazards.
3. Ensure the speaker is securely positioned on a stable surface (floor, stage, or wall).
4. On angled or slippery surfaces, secure the system to prevent movement caused by vibration.
5. Limit exposure to sound levels above 90 dB to prevent potential hearing damage.
6. Use a high-pass filter (HPF) to eliminate low, non-audible frequencies and avoid speaker damage and sound distortion.
7. Do not exceed the input power ratings specified to ensure safe and reliable operation of the speaker system.



SPECIFICATIONS

Frequency range (-6/+3 dB)	85 – 18000 Hz
Max continuous SPL	115,5 dB
Sensitivity (1W/1m half-space)	94 dB
Sensitivity (1W/1m) (free-space)	91 dB
Drivers	6" Coaxial
Front panel tilt angle	20°
Coverage	100° x 100°
Nominal impedance	4 Ohm
Power rating	150 W
Mounting	Built-in mounting frame
Connectors	Phoenix
Dimension (W x H x D)	368 x 368 x 186 mm (w/ grill)
	364 x 364 x 182 mm (w/o grill)
Net weight	7,6 kg