

# SUBWOOFER

Series




## THOR-Vi

### IN-WALL HOME CINEMA SUBWOOFER

Experience the next evolution of our award-winning THOR series: introducing the THOR-Vi, the Ultimate Cinema Subwoofer. Elevate your home theater with this masterpiece that delivers unrivaled power and breathtaking low-frequency effects, all in a subtle, unobtrusive design that blends seamlessly into any space.

The THOR-Vi is equipped with a custom-engineered 12" long-excursion woofer, meticulously designed for the ultimate audio experience. With its remarkably slim profile, the THOR-Vi is effortlessly integrated into your walls, providing a discreet yet commanding presence.

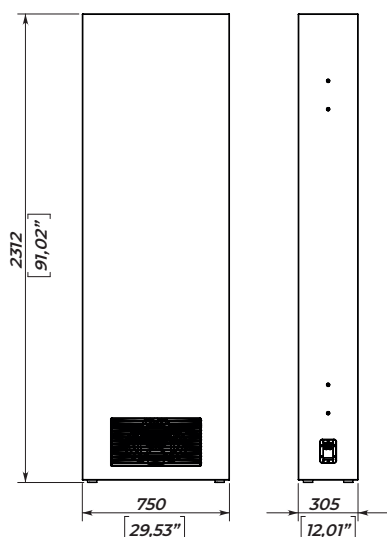

#### SAFETY INSTRUCTIONS

1. Keep liquids, direct sunlight, open flames, and heat sources away from the speaker system to prevent damage or failure.
2. Avoid using the system with damaged connectors or cables to prevent electrical shock or fire hazards.
3. Ensure the speaker is securely positioned on a stable surface (floor, stage, or wall).
4. On angled or slippery surfaces, secure the system to prevent movement caused by vibration.
5. Limit exposure to sound levels above 90 dB to prevent potential hearing damage.
6. Use a high-pass filter (HPF) to eliminate low, non-audible frequencies and avoid speaker damage and sound distortion.
7. Do not exceed the input power ratings specified to ensure safe and reliable operation of the speaker system.

#### SPECIFICATIONS

Frequency response ( $\pm 3$ dB)	17 – 160 Hz
Frequency range (-10 dB)	15 – 200 Hz
Max continuous SPL	124 dB
Sensitivity (1W/1m half-space)	96 dB
Low-frequency woofer	12-inch (4-inch voice coil) ridged glass-fiber reinforced enclosure
Nominal impedance	4 Ohm
Power rating	600 W
Connectors	Banana terminal
Dimension (W x H x D)	750 x 2312 x 305 mm
Net weight	88,6 kg

#### CTA-2010 RESULTS

Model	Driver	Loading	Parametr									
THOR-Vi	12"	ported	Freq, Hz	80	63	50	40	31,5	25	20	18	16
			SPL, dB	116,8 (amp limiter)	114,4 (amp limiter)	118,7 (amp limiter)	116,8 (amp limiter)	117,5	118	118	114	109