

# SUBWOOFER


Series



## SBV21

### SUBWOOFER

SBV21 is a high-performing subwoofer created specifically to deliver a powerful immersive cinema experience into your home theater. This highly sensitive 21" subwoofer is only 500mm (15 3/4 inches) deep, conveniently saving so much-needed space behind the screen area. Large vents are located on both sides of the cabinet, reducing the turbulence noises and preventing any screen movement by the airflow.

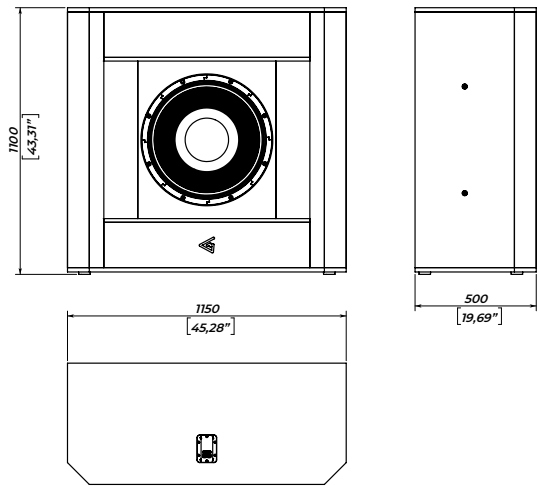

#### SPECIFICATIONS

Frequency response ( $\pm 3$ dB)	22 – 150 Hz
Frequency range (-10 dB)	19 – 300 Hz
Max continuous SPL <sup>2</sup>	128 dB
Sensitivity (1W/1m half-space) <sup>1</sup>	98 dB
Low-frequency woofer	21-inch (4,5-inch voice coil) ridged glass-fiber reinforced enclosure
Nominal impedance	4 Ohm
Power rating <sup>3</sup>	1000 W
Connectors	Banana terminals
Mounting	4 x M10 points for an antishock mounting
Dimension (W x H x D)	1150 x 1100 x 500 mm
Net weight	93 kg

#### SAFETY INSTRUCTIONS

1. Keep liquids, direct sunlight, open flames, and heat sources away from the speaker system to prevent damage or failure.
2. Avoid using the system with damaged connectors or cables to prevent electrical shock or fire hazards.
3. Ensure the speaker is securely positioned on a stable surface (floor, stage, or wall).
4. On angled or slippery surfaces, secure the system to prevent movement caused by vibration.
5. Limit exposure to sound levels above 90 dB to prevent potential hearing damage.
6. Use a high-pass filter (HPF) to eliminate low, non-audible frequencies and avoid speaker damage and sound distortion.
7. Do not exceed the input power ratings specified to ensure safe and reliable operation of the speaker system.

<sup>1</sup> - dB SPL, IEC 60268-5 pink noise, 1W / 1m, half- and free- space  
<sup>2</sup> - dB SPL RMS, IEC 60268-5 pink noise, measured on nominal power  
<sup>3</sup> - 2 hour power test, IEC filtered noise, 6 dB crest factor